

OCHRE LIGHT



PRODUCT CATALOGUE 2020



ALMA LIGHTING

The fittings listed in this product catalogue are only a small selection of the entire range of products from ALMA Lighting. ALMA has the ability to customise many fittings to the needs of your project. Please contact us with your project details or product requirements so we can provide you with a unique lighting solution.

Please email us at sales@almalighting.com.au or call us on (02) 9690 0666.

While every care has been taken with the details of this product catalogue, ALMA Lighting accepts no responsibility for any inaccuracies. ALMA Lighting reserves the right to change the specifications without notice to continually ensure you receive the most up to date information on our products.

RESET 80



Reset 80 is an efficient, reliable downlight for general illumination purposes. The COB Chip and reflector are deeply housed to reduce glare, while maintaining a compact size in this simple neat fitting. The Reset 80 can also be used in projects with the Flow 80 downlight as they have the same sized housing and appearance.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V
POWER	16W
CRI	>90
CCT	2700K, 3000K
LUMENS	70% at 33,000 hrs
CUT OUT	80mm
CHIP	Citizen LED
BEAM ANGLE	36°/55°
DIMMING	TR Leading/Trailing Edge Dali Bluetooth
WARRANTY	5 Year Limited Warranty

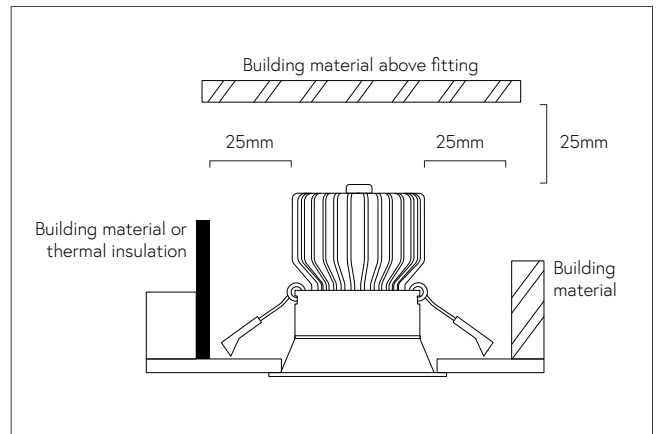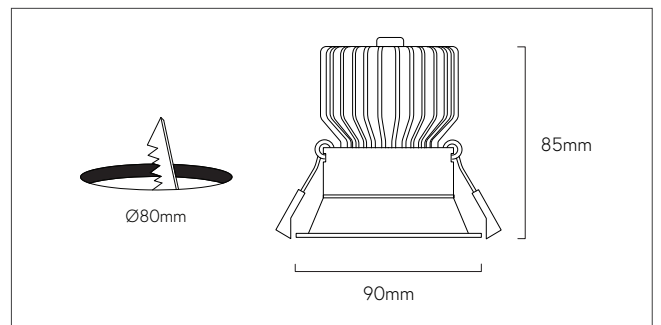

ORDERING OPTIONS

FITTING	HOUSING	COLOUR	BEAM	CCT	DIMMING
RE8	Fixed (F)	White (3)	Medium Beam 36° (MB) Wide Beam 55° (WB)	2700K (27K) 3000K (3K)	Leading/Trailing (TR) Dali Dimming (DD) Bluetooth (BT)

ORDER CODE

RE8					
-----	--	--	--	--	--

FLOW 80

Flow 80 Recessed downlights utilise warm dimming technology. As the downlight dims the colour temperature warms up from 3000K evenly down to 1800K, creating an atmosphere that is relaxed and intimate, perfect for hospitality applications.



The COB Chip and reflector are deeply housed to reduce glare, while maintaining a compact size in this simple neat fitting.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V
POWER	16W
CRI	>90
CCT	1800K - 3000K
LUMENS	70% at 33,000 hrs
CUT OUT	80mm
CHIP	COB LED
BEAM ANGLE	36°, 55°
DIMMING	Leading/Trailing Edge Dali Bluetooth
OPTIONAL	Dim-to-Warm, Tunable White
WARRANTY	5 Year Limited Warranty

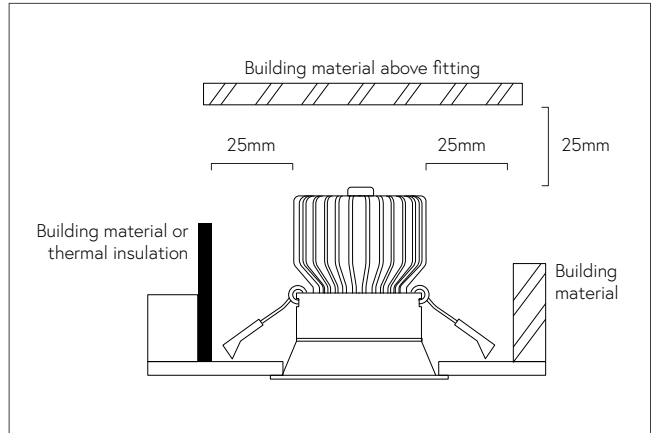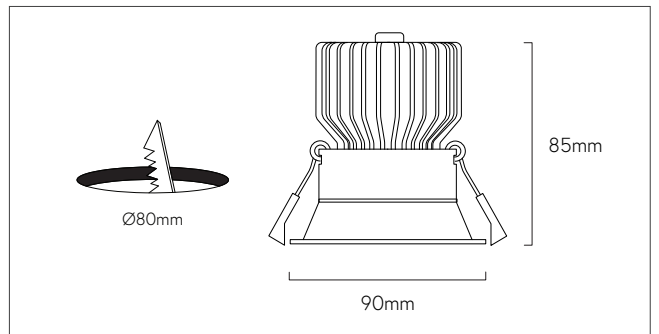

ORDERING OPTIONS

FITTING	HOUSING	COLOUR	BEAM	CCT	DIMMING
FL8	Fixed (F)	White (3)	Medium Beam 36° (MB) Wide Beam 55° (WB)	1800K (18K) 2700K (27K) 3000K (3K)	Leading/Trailing (TR) Dali Dimming (DD) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

FL8					
------------	--	--	--	--	--

FLOW 90



Flow 90 Recessed downlights utilise warm dimming technology. As the downlight dims the colour temperature warms up from 3000K evenly down to 1800K, creating an atmosphere that is relaxed and intimate, perfect for hospitality applications. The COB Chip and reflector are deeply housed to reduce glare, while maintaining a compact size in this simple neat fitting. Available in both fixed and adjustable versions.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V
POWER	16W
CRI	>90
CCT	1900K - 3000K
LUMENS	70% at 33,000 hrs
CUT OUT	90mm
CHIP	Citizen LED
BEAM ANGLE	36°/55°
TILT	25° (on adjustable model)
DIMMING	TR Leading/Trailing Edge Dali Bluetooth
WARRANTY	5 Year Limited Warranty

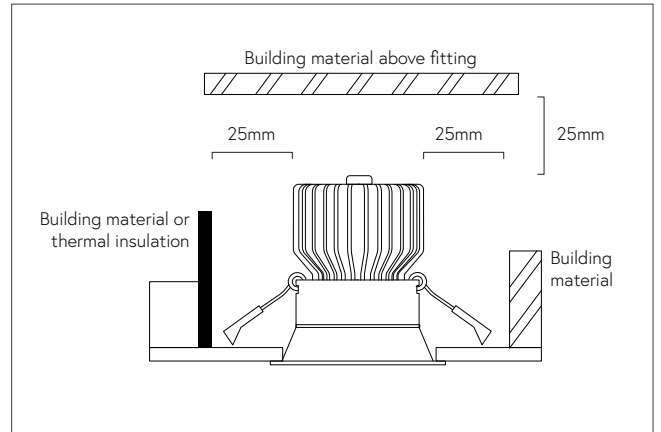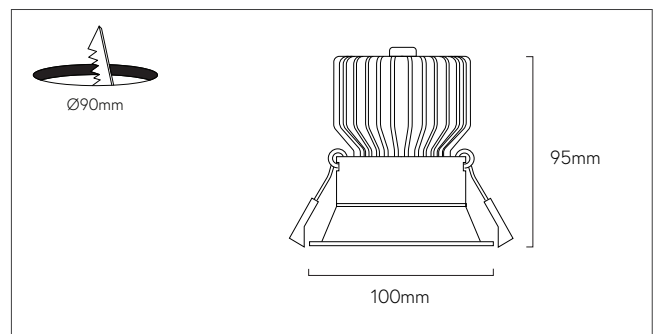

ORDERING OPTIONS

FITTING	HOUSING	COLOUR	BEAM	CCT	DIMMING
FL9	Fixed (F) Adjustable (A)	White (3)	Medium Beam 36° (MB) Wide Beam 55° (WB)	1900K (18K) 2700K (27K) 3000K (3K)	Leading/Trailing (TR) Dali Dimming (DD) Bluetooth (BT)

ORDER CODE

FL9					
------------	--	--	--	--	--

SHIFT

Shift is a 12W, slim profile downlight with a wide beam angle and a lumen output up to 1000 lumens (12W, 4000K). It is available in both warm and cool white colour temperatures and can be Leading/Trailing dimmed.

PRODUCT DETAILS

APPLICATION	General Illumination, Residential, Shopping Malls, Commercial Buildings
COLOURS	White
MATERIALS	Aluminium Body

TECHNICAL DATA



INPUT POWER	240V
POWER	12W
OUTPUT	850 - 950 lm
LUMENS	Maintenance: 70% at 33,000 hrs
CCT	3000K, 4000K, 6000K
CUT OUT	100mm
BEAM ANGLE	90 Degrees
CRI	80+
IP	44
DIMMING	Leading/Trailing Edge Dali

ORDERING OPTIONS

FITTING	CCT	DIMMING
SH	3000K (3K) 4000K (4K) 6000K (6K)	Leading/Trailing (TR) Dali Dimming (DD)

ORDER CODE

SH		
----	--	--

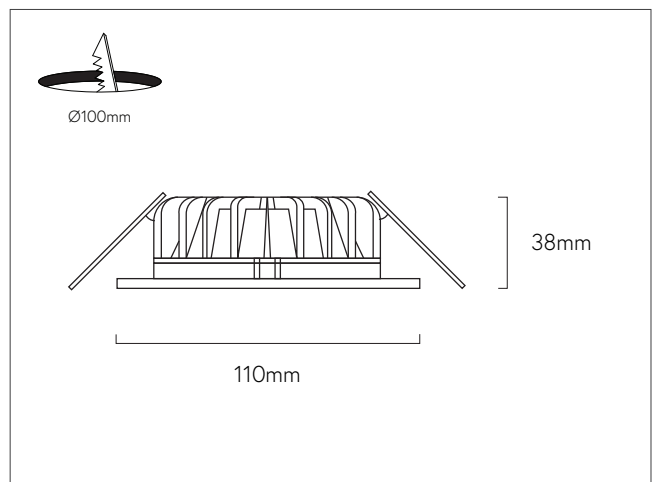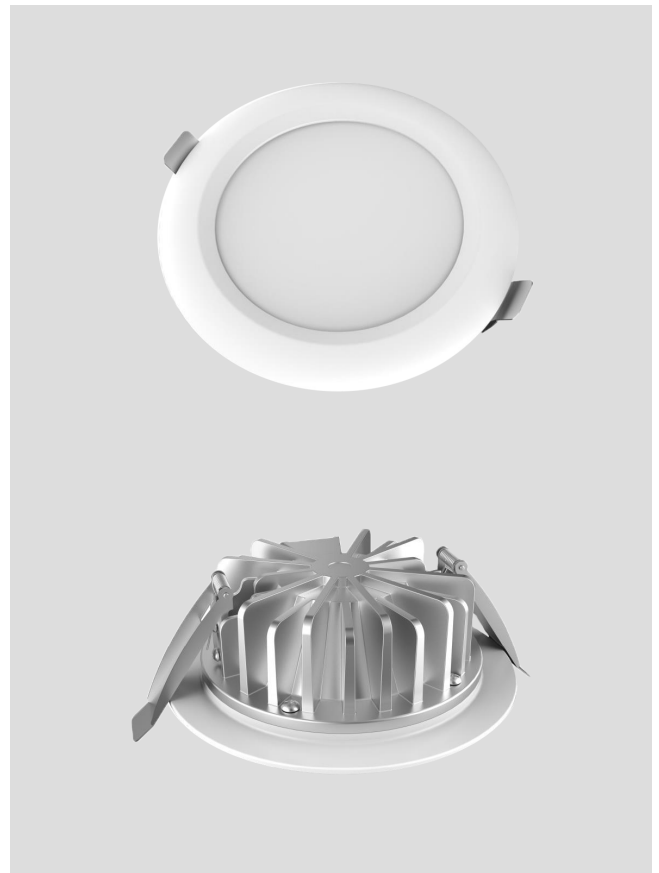

SEN



Sen Recessed downlights are a slim low profile downlight suitable for retail, hospitality and other commercial applications. The colour temperature of Sen downlights can be adjusted (between 3000, 4000 and 6000K) before installation using the switch located at the rear of the fitting.

PRODUCT DETAILS

APPLICATION	General Illumination, Residential, Shopping Malls, Commercial Buildings
COLOURS	White
MATERIALS	Aluminium Body

TECHNICAL DATA

INPUT POWER	240V
POWER	12W
OUTPUT	850 - 950 lm
LUMENS	Maintenance: 70% at 33,000 hrs
CCT	3000K, 4000K, 6000K
CUT OUT	90mm
BEAM ANGLE	90 Degrees
CRI	80+
IP	44
DIMMING	Leading/Trailing Edge

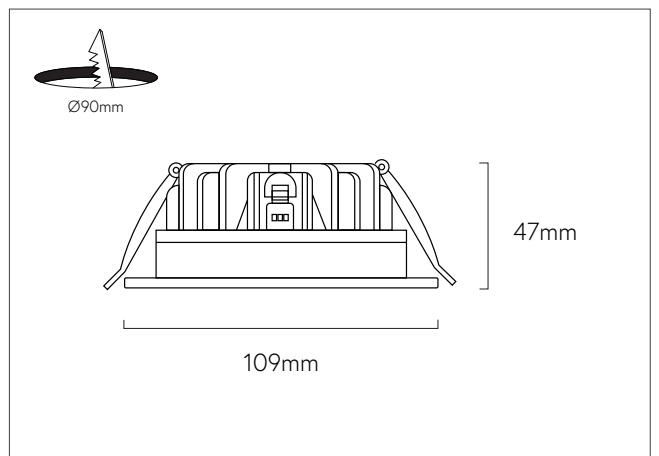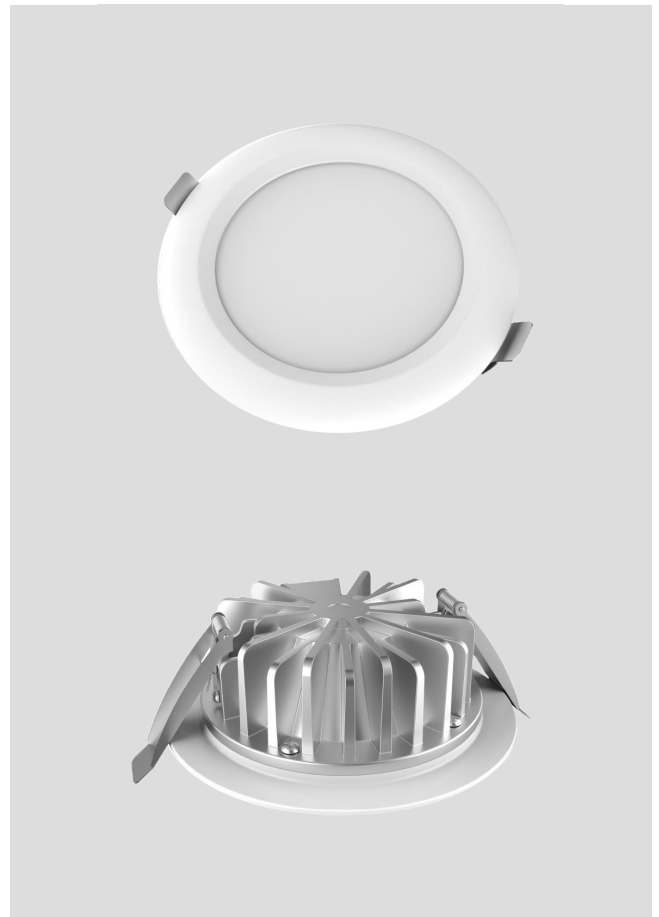

AIM ADJUSTABLE


Aim Adjustable is an adjustable, recessed downlight that suits a variety of applications from residential through to retail and hospitality. It is available in 3 wattages (20W, 28W and 38W), 4 beam widths (15°, 23°, 35° and 60°) and can be suitably dimmed via Dali, Leading/Trailing or 1-10V dimming.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White, Black
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V			
POWER	20W, 28W or 38W			
CRI	>90			
CCT	3000K, 4000K			
LUMENS	Maintenance: 70% at 33,000 hrs			
LUMINOUS FLUX	20W	28W	38W	
	3000K	1950 lm	2500 lm	3250 lm
	4000K	1990 lm	2550 lm	3310 lm
IP	IP20			
CUT OUT	150mm			
BEAM ANGLE	15° / 23° / 35° / 60°			
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth			
OPTIONAL	Dim-to-Warm, Tunable White			
WARRANTY	5 year limited warranty			

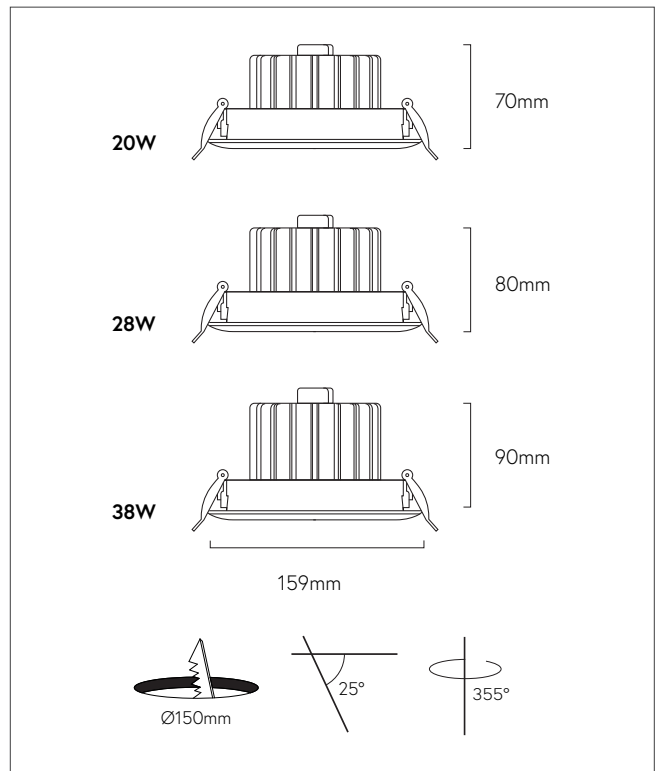

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
AA	20 Watts (20W) 28 Watts (28W) 38 Watts (38W)	Black (2) White (3)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

AA					
----	--	--	--	--	--

AIM


Aim is a versatile recessed downlight that suits a variety of applications from residential through to retail and hospitality. It is IP44 rated, available in 3 different wattages (20, 28, and 38W), 4 beam widths (15°, 23°, 35° and 60°) and can be suitably dimmed via Dali, Leading/Trailing or 1-10V dimming. The deep housing reduces glare and has a smooth, curved interior.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White, Black
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V			
POWER	20W, 28W or 38W			
CRI	>90			
CCT	3000K, 4000K			
LUMENS	Maintenance: 70% at 33,000 hrs			
LUMINOUS FLUX		20W	28W	38W
	3000K	1950 lm	2500 lm	3250 lm
	4000K	1990 lm	2550 lm	3310 lm
IP	IP44			
CUT OUT	175mm			
BEAM ANGLE	15° / 23° / 35° / 60°			
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth			
OPTIONAL	Dim-to-Warm, Tunable White			
WARRANTY	5 year limited warranty			

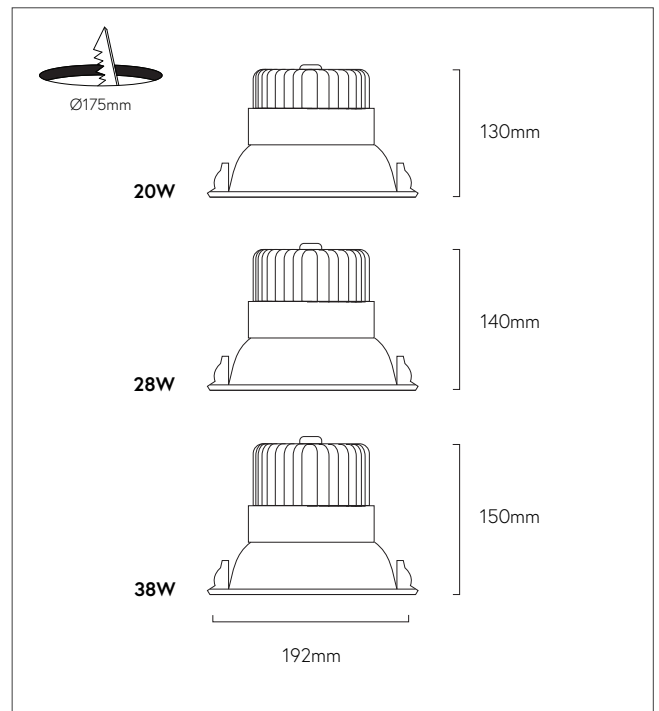

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
A	20 Watts (20W) 28 Watts (28W) 38 Watts (38W)	Black (2) White (3)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

A					
----------	--	--	--	--	--

AIM BAFFLE


Aim Baffle is a set back, adjustable recessed downlight that suits a variety of applications from residential through to retail and hospitality. It is available in 3 wattages (20W, 28W and 38W), 4 beam widths (15°, 23°, 35° and 60°) and can be suitably dimmed via Dali, Leading/Trailing or 1-10V dimming.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White, Black
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V			
POWER	20W, 28W or 38W			
CRI	>90			
CCT	3000K, 4000K			
LUMENS	Maintenance: 70% at 33,000 hrs			
LUMINOUS FLUX	20W	28W	38W	
	3000K	1950 lm	2500 lm	3250 lm
	4000K	1990 lm	2550 lm	3310 lm
IP	IP20			
CUT OUT	162mm			
BEAM ANGLE	15° / 23° / 35° / 60°			
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth			
OPTIONAL	Dim-to-Warm, Tunable White			
WARRANTY	5 year limited warranty			

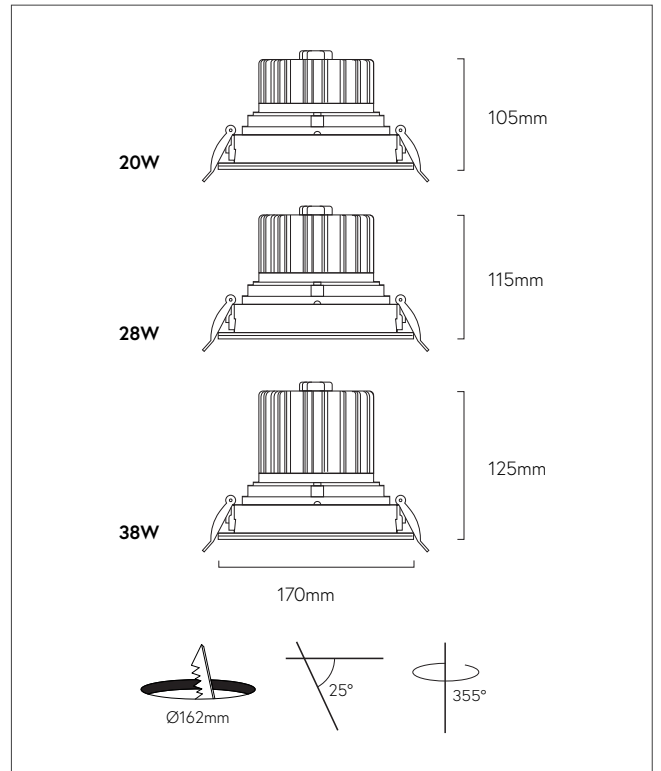

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
AB	20 Watts (20W) 28 Watts (28W) 38 Watts (38W)	Black (2) White (3)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

AB				
-----------	--	--	--	--

AIM L


Aim L is a versatile recessed downlight that suits a variety of applications from residential through to retail and hospitality. It is IP44 rated, available in 3 different wattages (20, 28 and 38W), 4 beam widths (15°, 23°, 35° and 60°) and can be suitably dimmed via Dali, Leading/Trailing or 1-10V dimming. The deep housing reduces glare and has a smooth, curved interior.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White, Black
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V			
POWER	20W, 28W or 38W			
CRI	>90			
CCT	3000K, 4000K			
LUMENS	Maintenance: 70% at 33,000 hrs			
LUMINOUS FLUX		20W	28W	38W
	3000K	1950 lm	2500 lm	3250 lm
	4000K	1990 lm	2550 lm	3310 lm
IP	IP44			
CUT OUT	210mm			
BEAM ANGLE	15° / 23° / 35° / 60°			
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth			
OPTIONAL	Dim-to-Warm, Tunable White			
WARRANTY	5 year limited warranty			

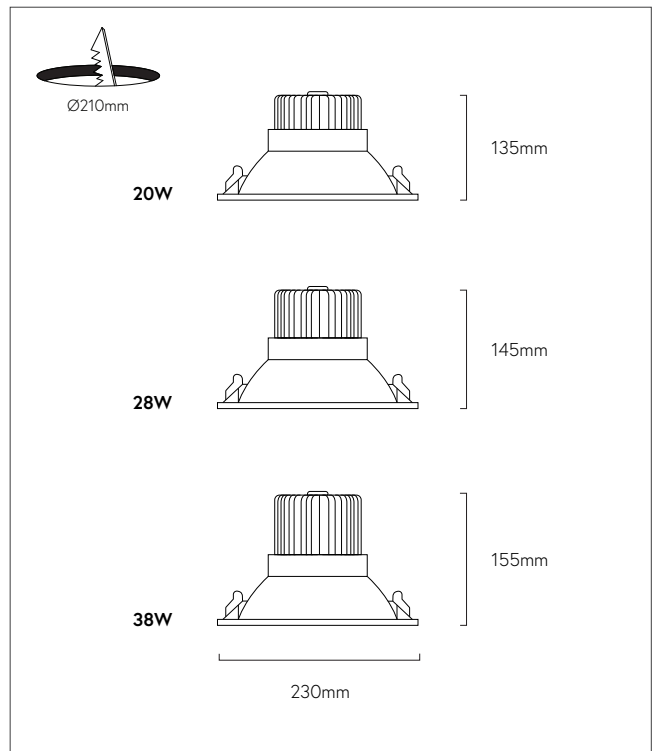

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
AL	20 Watts (20W) 28 Watts (28W) 38 Watts (38W)	Black (2) White (3)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

AL					
----	--	--	--	--	--

AIM SQUARE


Aim Square is a set back, adjustable recessed downlight that suits a variety of applications from residential through to retail and hospitality. It is available in 3 wattages (20W, 28W and 38W), 4 beam widths (15°, 23°, 35° and 60°) and can be suitably dimmed via Dali, Leading/Trailing or 1-10V dimming.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White, Black
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V			
POWER	20W, 28W or 38W			
CRI	>90			
CCT	3000K, 4000K			
LUMENS	Maintenance: 70% at 33,000 hrs			
LUMINOUS FLUX	20W	28W	38W	
	3000K	1950 lm	2500 lm	3250 lm
	4000K	1990 lm	2550 lm	3310 lm
IP	IP20			
CUT OUT	162mm			
BEAM ANGLE	15° / 23° / 35° / 60°			
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth			
OPTIONAL	Dim-to-Warm, Tunable White			
WARRANTY	5 year limited warranty			

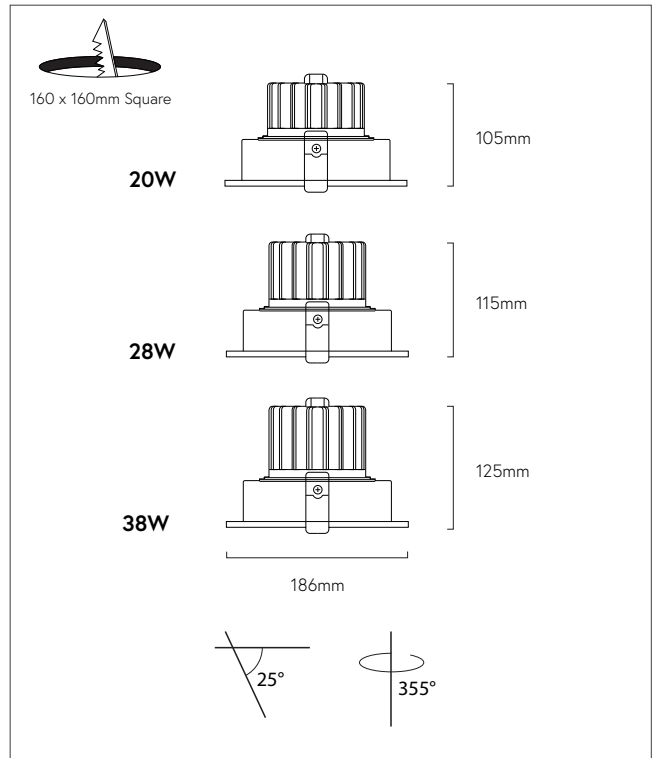

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
AS	20 Watts (20W) 28 Watts (28W) 38 Watts (38W)	Black (2) White (3)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

AS					
----	--	--	--	--	--

AIM DOUBLE

Aim Double is a set back, adjustable twin recessed downlight that suits a variety of applications from residential through to retail and hospitality. It is available in 3 wattages (40W, 56W and 76W), 4 beam widths (15°, 23°, 35° and 60°) and can be suitably dimmed via Dali, Leading/Trailing or 1-10V dimming.


PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White, Black
MATERIALS	Aluminium Body
LED	COB LED



TECHNICAL DATA

INPUT POWER	240V			
POWER	40W, 56W, 76W			
CRI	>90			
CCT	3000K, 4000K			
LUMENS	Maintenance: 70% at 33,000 hrs			
LUMINOUS FLUX		40W	56W	76W
	3000K	3900 lm	5000 lm	6500 lm
	4000K	3980 lm	5100 lm	6620 lm
IP	IP20			
CUT OUT	308 x 160mm			
BEAM ANGLE	15° / 23° / 35° / 60°			
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth			
OPTIONAL	Dim-to-Warm, Tunable White			
WARRANTY	5 year limited warranty			

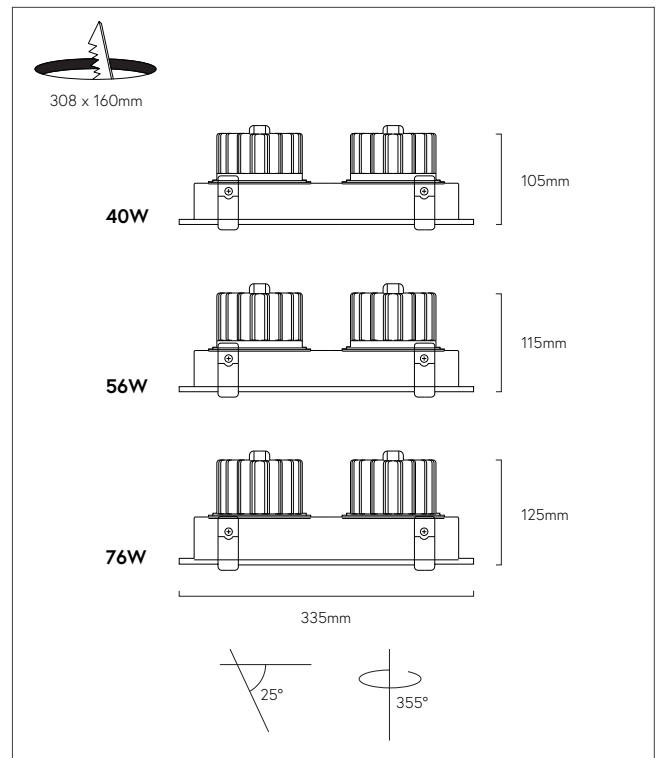

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
AD	40 Watts (40W) 56 Watts (56W) 76 Watts (76W)	Black (2) White (3)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

AD					
----	--	--	--	--	--

AIM TRIPLE


Aim Triple is a set back, adjustable triple recessed downlight that suits a variety of applications from residential through to retail and hospitality. It is available in 3 wattages (60W, 84W and 114W), 4 beam widths (15°, 23°, 35° and 60°) and can be suitably dimmed via Dali, Leading/Trailing or 1-10V dimming.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White, Black
MATERIALS	Aluminium Body
LED	COB LED

TECHNICAL DATA

INPUT POWER	240V			
POWER	60W, 84W, 114W			
CRI	>90			
CCT	3000K, 4000K			
LUMENS	Maintenance: 70% at 33,000 hrs			
LUMINOUS FLUX		60W	84W	114W
	3000K	5850 lm	7500 lm	9750 lm
	4000K	5970 lm	7650 lm	9930 lm
IP	IP20			
CUT OUT	458 x 160mm			
BEAM ANGLE	15° / 23° / 35° / 60°			
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth			
OPTIONAL	Dim-to-Warm, Tunable White			
WARRANTY	5 year limited warranty			

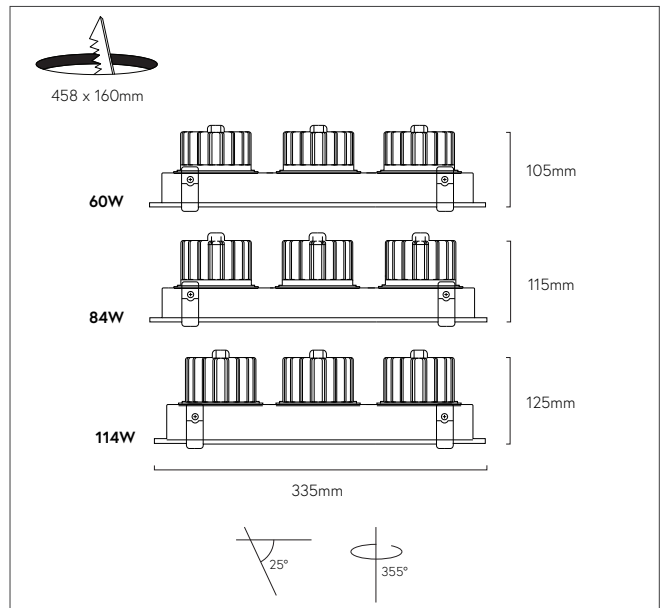

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
AT	60 Watts (60W) 84 Watts (84W) 114 Watts (114W)	Black (2) White (3)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

AT					
----	--	--	--	--	--

BAFFLEX


Bafflex is a medium sized, commercial recessed downlight that has a powerful LED package with the flexibility of Baffle colours to match any interior space.

PRODUCT DETAILS

TRIM COLOUR	White, Black
BAFFLE COLOUR	White, Black, Silver, Specular, Gold
LED	COB LED

TECHNICAL DATA

MOUNTING	Recessed			
POWER	20W, 28W, 38W			
CRI	>90			
CCT	3000K, 4000K			
LUMENS	20W	28W	38W	
	3000K	1950lm	2500lm	3250lm
	4000K	1990lm	2550lm	3310lm
CUT OUT	125mm			
BEAM ANGLE	15° / 23° / 35° / 60°			
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth			
OPTIONAL	Dim-to-Warm, Tunable White			
IP	IP20			

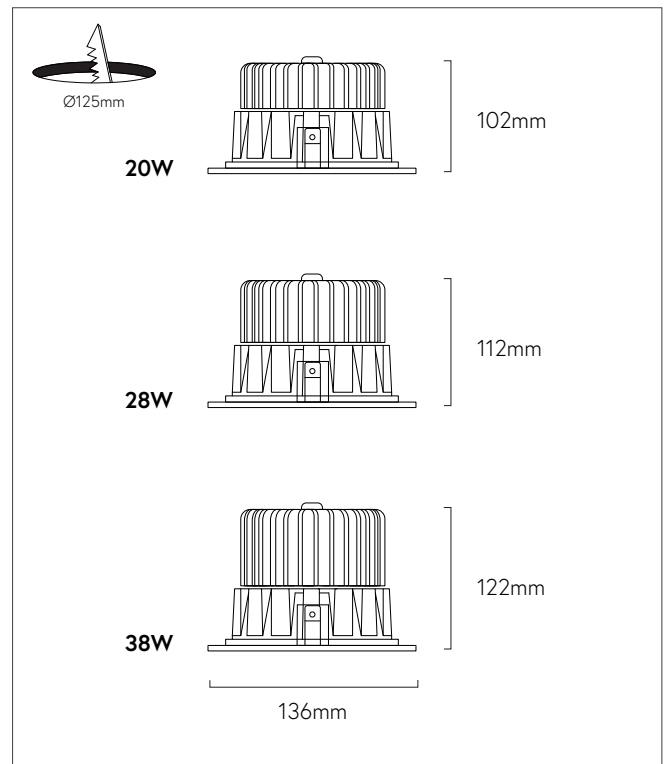

ORDERING OPTIONS

FITTING	WATTAGE	BAFFLE COLOUR	TRIM COLOUR	BEAM	CCT	DIMMING
BA	20 Watts (20W) 28 Watts (28W) 38 Watts (38W)	Black (B2) White (B3) Silver (B4) Gold (B5) Specular (B6)	Black (2) White (3)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

BA					
----	--	--	--	--	--


DECOR SPOTLIGHT

PRODUCT DETAILS

BODY COLOUR	White, Black, Gold, Chrome, Copper, etc.
MOUNTING	Track Mount (240V or 48V) Surface Mount or Pendant
ACCESSORIES	Honeycomb Filter, Optional Magnetic Optics
BESPOKE	Tube length up to 500mm is available
LIGHT SOURCE	COB LED

TECHNICAL DETAILS

POWER	9W, 13W		
CRI	>90		
CCT	3000K, 4000K		
LUMENS		9W	13W
	3000K	770 lm	1030 lm
	4000K	810 lm	1080 lm
BEAM ANGLE	24°, 36°, 55°		
IP	IP20		
DIMMING	Leading/Trailing, Dali		

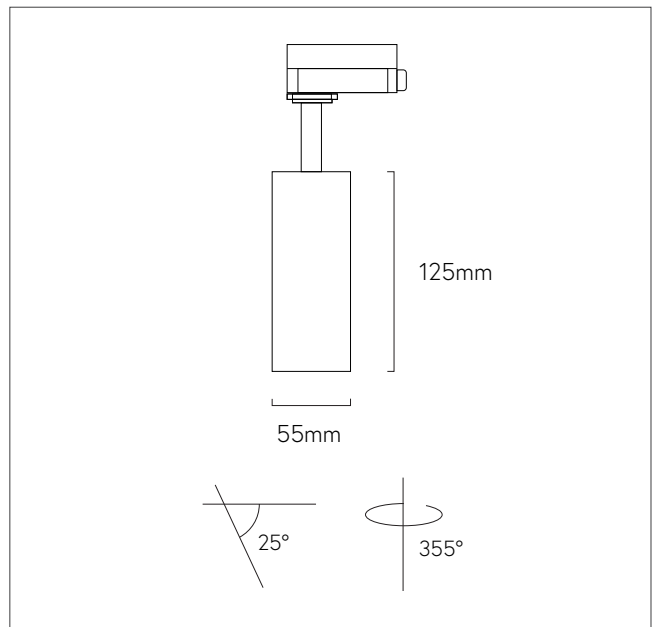

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
DE	9 Watts (9W) 13 Watts (13W)	Black (2) White (3) Gold (15) Copper (16) Chrome (17)	Narrow Beam 24° (NB) Medium Beam 36° (MB) Wide Beam 55° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD)

ORDER CODE

DE					
----	--	--	--	--	--


LIFT DOWNLIGHT

PRODUCT DETAILS

BODY COLOUR	White, Black
BAFFLE COLOUR	White, Black, Gold
MOUNTING	Surface Mount (or Suspended)
ACCESSORIES	Honeycomb Filter
LIGHT SOURCE	CITIZEN COB LED

TECHNICAL DETAILS

POWER	15W	
CRI	>90	
CCT	3000K, 4000K	
LUMENS	3000K	1100 lm
	4000K	1130 lm
BEAM ANGLE	15°, 24°, 35°, 55°	
IP	IP20	
DIMMING	Leading/Trailing Dimming	

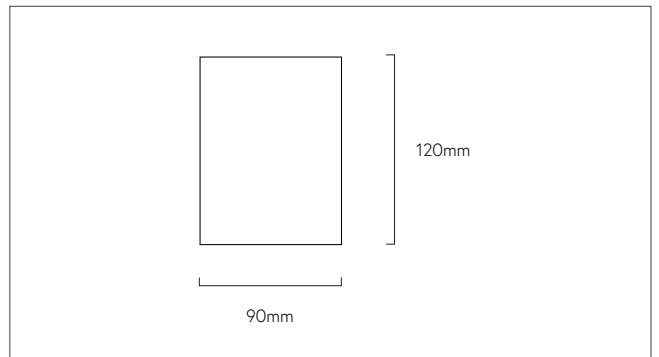

ORDERING OPTIONS

FITTING	BODY COLOUR	BAFFLE COLOUR	BEAM	CCT	DIMMING
LF	Black (2) White (3)	Black (2B) White (3B) Gold (4B)	Extra Narrow Beam 15° (XNB) Narrow Beam 24° (NB) Medium Beam 35° (MB) Wide Beam 55° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR)

ORDER CODE

LF					
-----------	--	--	--	--	--

ROAM

LED Ceiling mounted fitting in 4 sizes from 400mm to 1200mm in diameter. Also available in a suspended version.

PRODUCT DETAILS

APPLICATION	General Illumination
COLOUR	White
MATERIALS	Aluminium Body Polycarbonate Diffuser

TECHNICAL DETAILS

LUMINOUS EFFICACY	85-90 lm/W	
CCT	3100K, 4200K, 5000K, 6300K	
WATTAGE	400mm	29W
	600mm	58W
	900mm	102W
	1200mm	150W
DIMMING	On/Off 1-10V Dali	



ORDERING OPTIONS

FITTING	BODY COLOUR	SIZE/WATTAGE	CCT	DIMMING
RO	White (3)	400mm (29W) 600mm (58W) 900mm (102W) 1200mm (150W)	3100K (31K) 4200K (42K) 5000K (5K) 6300K (63K)	Dali Dimming (DD) 1-10V DC Control (DC)

ORDER CODE

RO				
----	--	--	--	--

MINI DEEP DOWNLIGHT

PRODUCT DETAILS

BODY COLOUR White, Black

TECHNICAL DETAILS

LIGHT SOURCE COB LED

POWER 5W, 8W, 12W

CRI >80 (Optional >90)

CCT 3000K


LUMENS	5W	8W	12W
	>300 lm	>480 lm	>720 lm

BEAM ANGLE 15°, 24°

IP IP20

DIMMING Dali, Leading/Trailing, Bluetooth

LIFETIME 50,000hrs (L70)

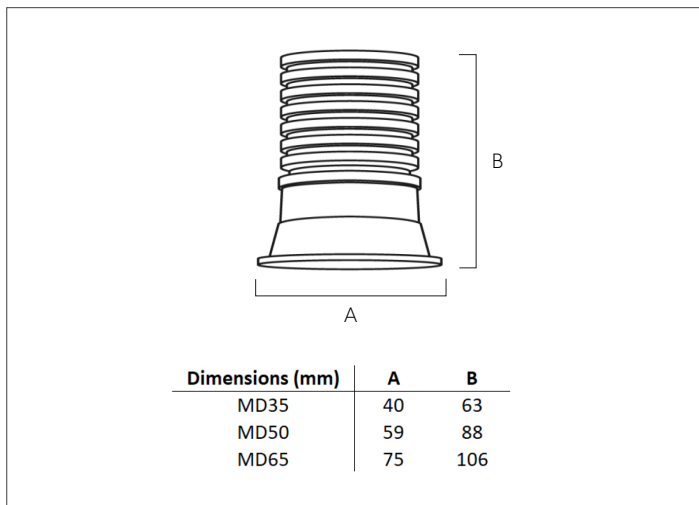

ORDERING OPTIONS

FITTING	WATTAGE	COLOUR	BEAM	CCT	DIMMING
MD35	5 Watts (5W)	Black (2)	Extra Narrow Beam 15° (XNB)	3000K (3K)	Leading/Trailing (TR) Dali Dimming (DD) Bluetooth (BT)
MD50	8 Watts (8W)	White (3)	Narrow Beam 24° (NB)		
MD65	12 Watts (12W)				

ORDER CODE

MD35				
------	--	--	--	--

VIBE


Vibe 13/24/38/55 is a track spotlight designed for retail, hospitality and other commercial environments. The fitting has a high Colour Rendering Index and can be customised with a choice of 4 different beam angles.

PRODUCT DETAILS

APPLICATION	General Illumination, Retail, Hospitality
TRIM	White, Silver, Black
MATERIALS	Aluminium
WEIGHT	1.45kg

TECHNICAL DETAILS

INPUT POWER	240V, .185A	
LED	COB	
POWER	38W	
CRI	>90	
CCT	3000K, 4000K	
LUMENS	3000K	3250 lm
	4000K	3310 lm
BEAM ANGLE	13°, 24°, 38°, 55°	
DIMMING	Leading/Trailing Dimming Dali Dimming 1-10V DC Control Bluetooth	
OPTIONAL	Dim-to-Warm, Tunable White	
WARRANTY	5 year limited warranty	

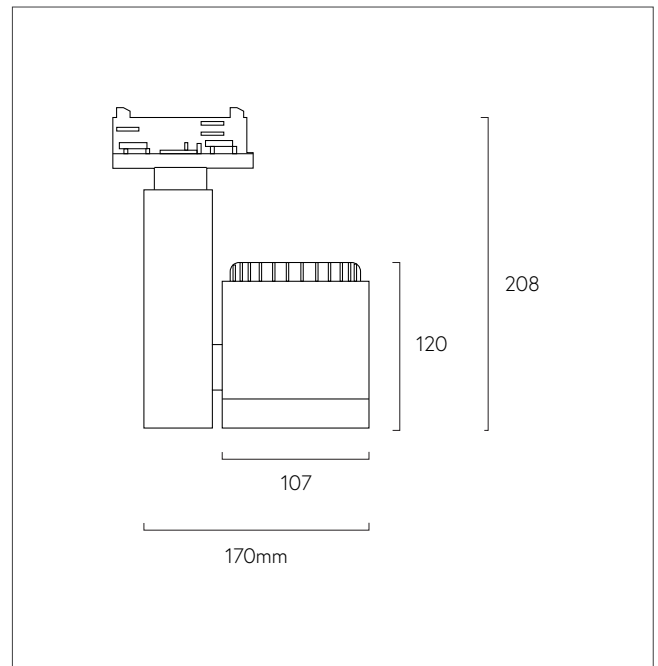

ORDERING OPTIONS

FITTING	BODY COLOUR	BEAM	CCT	DIMMING
VI	Black (2) White (3) Silver (6)	Extra Narrow Beam 13° (XNB) Narrow Beam 24° (NB) Medium Beam 38° (MB) Wide Beam 55° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

VI			
----	--	--	--

GAZE


The Gaze spotlight is an efficient, high output spotlight in a simple and neat design. Gaze has an output of 2650 lumens and is available in white, silver and black and three beam sizes.

PRODUCT DETAILS

APPLICATION	General Illumination, Retail, Hospitality
TRIM	White, Silver, Black
MATERIALS	Aluminium
WEIGHT	1.75kg

TECHNICAL DETAILS

INPUT POWER	240V, 1000mA	
POWER	40W	
CRI	>90	
LED	COB	
CCT	3000K, 4000K	
LUMENS	3000K	2650 lm
	4000K	
Maintenance: L70 at 50,000Hrs		
BEAM ANGLE	12°, 20°, 45°	
DIMMING	Dali Dimming Leading/Trailing	
WARRANTY	5 year limited warranty	

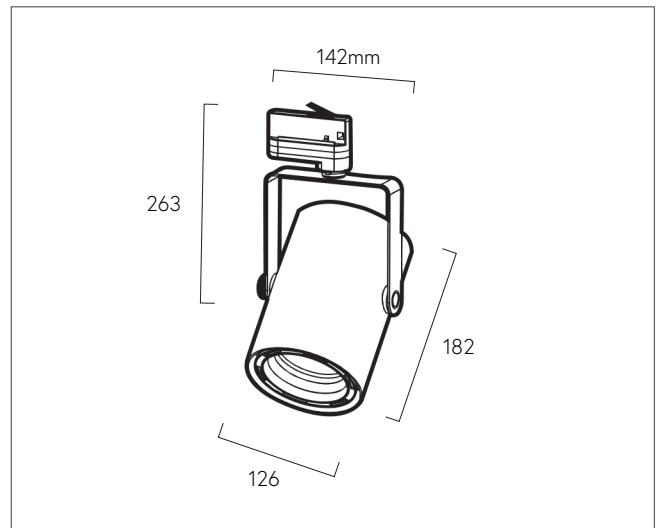

ORDERING OPTIONS

FITTING	BODY COLOUR	BEAM	CCT	DIMMING
GZ	Black (2) White (3) Silver (6)	Extra Narrow Beam 12° (XNB) Narrow Beam 20° (NB) Medium Beam 45° (MB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD)

ORDER CODE

GZ				
-----------	--	--	--	--

ANILLO

Ring shaped LED pendant. Indirect and direct lighting of spaces can be achieved with this functional and minimal design. Available in different sizes and wattages.

PRODUCT DETAILS

APPLICATION	General Illumination
TRIM	White, Black, Custom
MATERIALS	Aluminium, PC Cover

TECHNICAL DETAILS


INPUT POWER	83W
CCT	4200K
LUMENS	8134 Lumens
DIMMING	Non-Dim
DIMENSIONS	1000mm Dia, 95mm Height

ORDERING OPTIONS

FITTING	COLOUR	CCT	DIMMING
AN83	Black (2) White (3) Custom (5)	4200K (42K)	Non-Dimming (ND)

ORDER CODE

AN83			
-------------	--	--	--

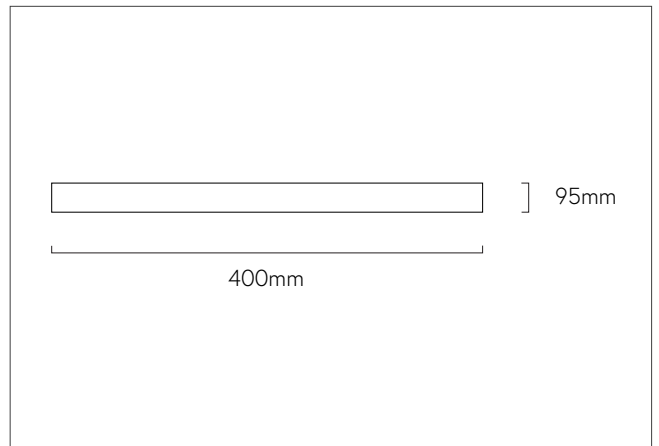


CENTRE

PRODUCT DETAILS

BODY COLOUR	White, Black	
MOUNTING	Surface Mount	Suspended

TECHNICAL DETAILS

LIGHT SOURCE	COB LED				
POWER	15W, 20W, 28W, 36W				
CRI	>90				
CCT	3000K, 4000K				
LUMENS		15W	20W	28W	36W
	3000K	1100lm	1950lm	2500lm	3140lm
	4000K	1130lm	1990lm	2550lm	3200lm
BEAM ANGLE	15°, 23°, 35°, 60°				
IP	IP20 (Optional IP54)				
DIMMING	Dali, Leading/Trailing, 1-10V, Bluetooth				
OPTIONAL	Dim-to-Warm, Tunable White Adapted with 111mm Light Engine				
LIFETIME	50,000hrs (L70)				

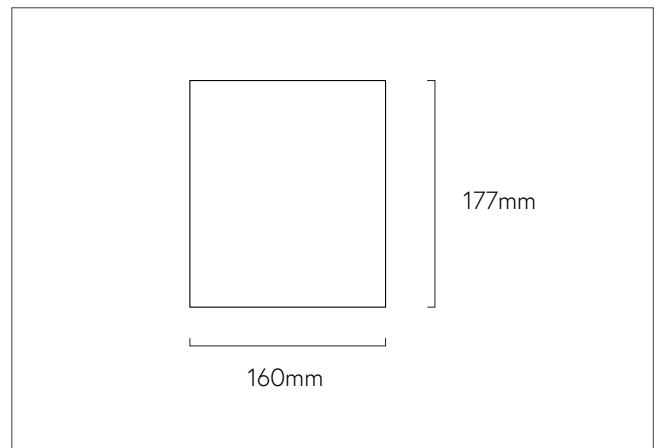

ORDERING OPTIONS

FITTING	COLOUR	WATTAGE	BEAM	CCT	DIMMING
CE	Black (2) White (3)	15 Watts (15W) 20 Watts (20W) 28 Watts (28W) 36 Watts (36W)	Extra Narrow Beam 15° (XNB) Narrow Beam 23° (NB) Medium Beam 35° (MB) Wide Beam 60° (WB)	3000K (3K) 4000K (4K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

CE					
----	--	--	--	--	--

T-RIDER

T-Rider is a 45W LED Panel suitable for T-Bar Troffer Ceilings. It has a 3500 lumen output and is an efficient panel for use in office environments.

PRODUCT DETAILS

APPLICATION T-bar Troffer Ceilings

TRIM White

TECHNICAL DETAILS

POWER 45W

CCT 4000K

LUMENS 3500 Lumens

DIMMING Non-Dim



DIMENSIONS 1195mm Length
297mm Wide
54mm High

ORDERING OPTIONS

FITTING	COLOUR	CCT	DIMMING
TR	White (3)	4000K (4K)	Non-Dimming (ND)

ORDER CODE

TR	3	4K	ND
----	---	----	----

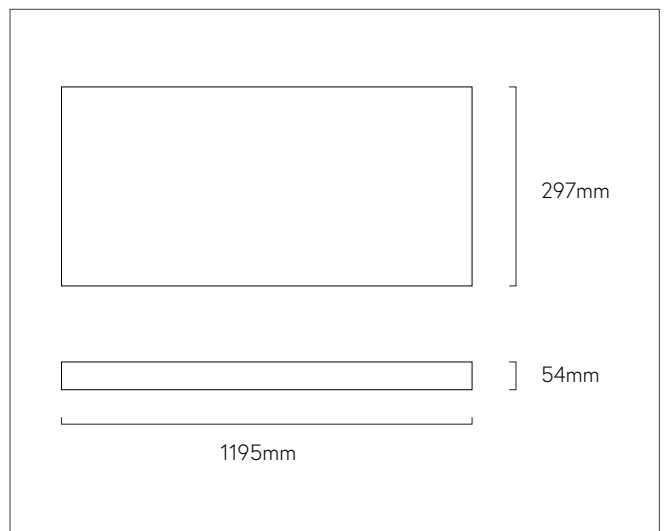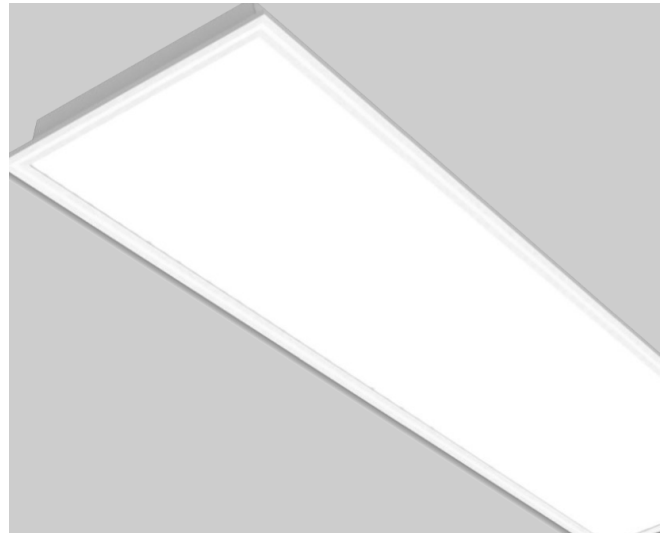

RETRACTABLE RECESSED SPOT

PRODUCT DETAILS

BODY COLOUR White, Black

MOUNTING Recessed

TECHNICAL DETAILS

LIGHT SOURCE COB LED

WATTAGE 12W, 25W, 2x12W, 2x25W

CRI >90

CCT 3000K, 4000K, 5000K


LUMENS	12W	25W
	815lm	1910lm

BEAM ANGLE 15°, 24°, 38°


IP IP20

DIMMING Dali, Leading/Trailing, 1-10V, Bluetooth


OPTIONAL Dim-to-Warm, Tunable White

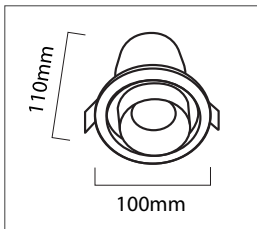


RRS90-12W
Cutout: ø90mm

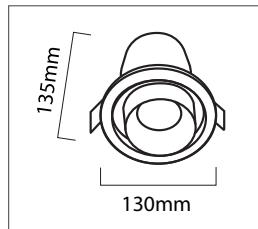

RRS120-25W
Cutout: ø120mm

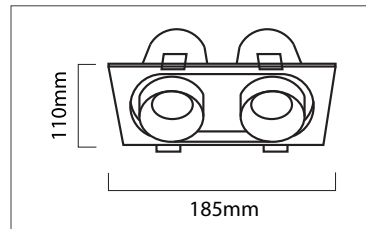

RRS90-24W
Cutout: ø175 *90mm

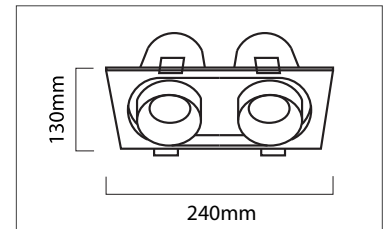

RRS120-50W
Cutout: ø230mm *110mm

ORDERING OPTIONS

FITTING	COLOUR	WATTAGE	BEAM	CCT	DIMMING
RRS	Black (2) White (3)	12 Watts (12W) 25 Watts (25W) 2x12 Watts (24W) 2x25 Watts (50W)	Extra Narrow Beam 15° (XNB) Narrow Beam 24° (NB) Medium Beam 38° (MB)	3000K (3K) 4000K (4K) 5000K (5K)	Leading/Trailing (TR) Dali Dimming (DD) 1-10V DC Control (DC) Bluetooth (BT) Dim-to-Warm (DW) Tunable White (TW)

ORDER CODE

RRS				
-----	--	--	--	--

P1264

P1264 is a 40W LED panel suitable for office applications, and general illumination in other commercial applications. Available in white or silver and able to dimmed by Leading/Trailing dimming.

PRODUCT DETAILS

APPLICATION General Illumination, Offices

COLOURS White, Silver

TECHNICAL DATA

POWER 40W

LUMEN OUTPUT 4000K - 4000 lm

CCT 3000K, 4000K, 5000K, 6000K

CRI >80

IP 40



DIMMING Leading/Trailing Dimming

ORDERING OPTIONS

FITTING	COLOUR	CCT	DIMMING
P1264	White (3) Silver (4)	3000K (3K) 4000K (4K) 5000K (5K) 6000K (6K)	Leading/Trailing (TR)

ORDER CODE

P1264			
--------------	--	--	--

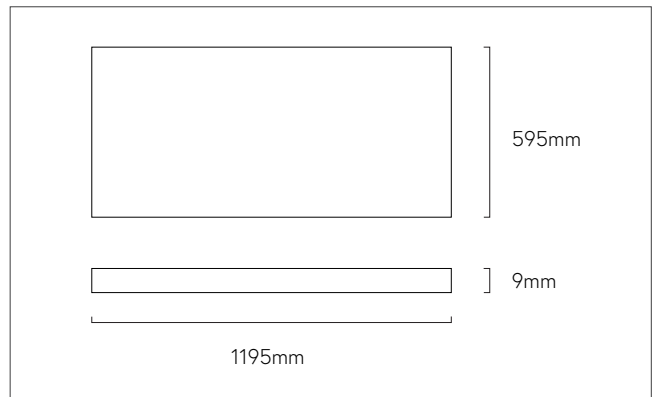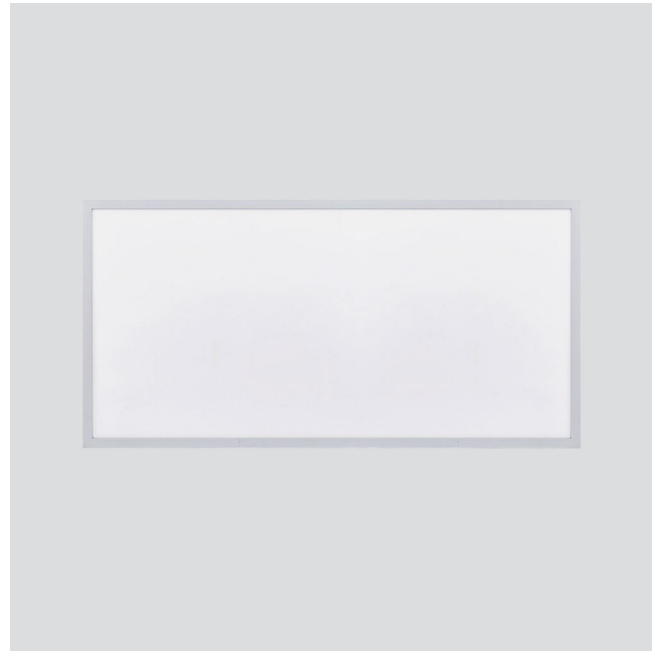

ALMA L I G H T I N G

Shop 3 and 4,
71-77 Regent Street, Redfern, NSW, 2016
(02) 9690 0666
sales@almalighting.com.au

www.almalighting.com.au