

Gunn Adjustable

Product Description


Professional 15W LED tilt adjustable downlight with dual reflector system to provide smooth glare-free output. Multi-chip technology means constant colour temperature. Assembled in Australia from corrosion resistant componentry. Easily customised.

Product Details

Application	General Illumination
Trim Colours	White, Black, Silver, Custom
Reflector Finishes	White, Black, Dark Satin, Rose Champagne, Gold, Ice Blue
Materials	Anodised aluminium reflector and heatsink. 304 stainless steel fascia

Technical Data

Input Power	240V 350mA driver c/w flex and plug
Power Consumption	15W
Colour Temperature Available	2700K 3000K 4000K
Lumen Output	
(15W) 2700K	900 lm
(15W) 3000K	1000 lm
(15W) 4000K	1100 lm
(21W) 2700K	1200 lm
(21W) 3000K	1363 lm
(21W) 4000K	1500 lm
CRI	92
Lumen Maintenance	L70 at 50 000 Hrs
Dimming	- TR Leading/Trailing Edge (Standard) - DD Dali Dim - DC 1-10V DC Control
Cut Out	108mm

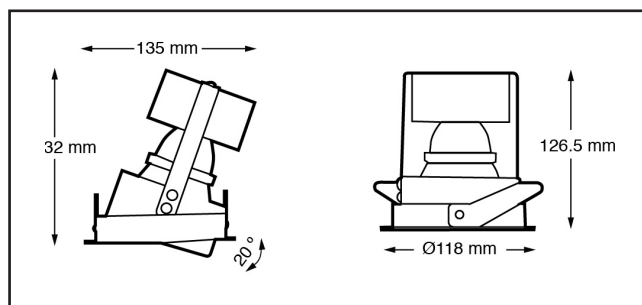

Order Information

Specify fitting options as per example below to order.

Example: **GA - 15W - 2 - 15R - 27K - NB - TR**

Fitting	Watts	Colour	Reflector	CCT	Beam	Dimming
GA	-	-	-	-	-	-

GA	15W	2	Standard	Special	27K	NB	TR
Gunn Adjustable	15 Watts	Black			2700K	Narrow Beam (24°)	Leading/Trailing
	21W	3	3R	16R	3K	MB	DD
	21 Watts	White	White	Rose	3000K	Medium Beam (38°)	Dali Dim
		6	2R	15R	4K	WB	DC
		Silver	Black	Gold	4000K	Wide Beam (60°)	1-10V DC Control
		5	10R	11R			
		Custom	Dark Satin	Ice Blue			
			18R				
			Champagne				

Standard Reflector Colours

White

Black

Dark Satin

Champagne



Special Reflector Colours

Rose

Gold

Ice Blue



Reflectors are shown illuminated.